
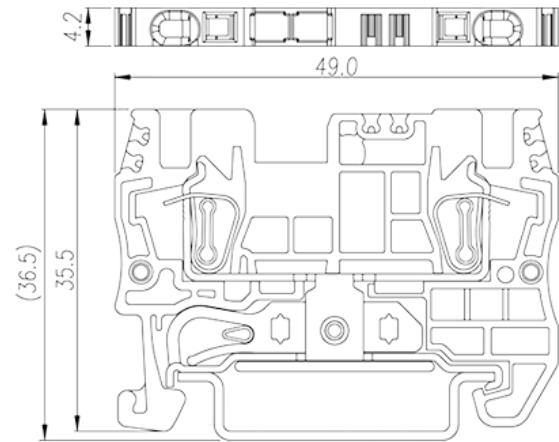


AK1.5-PE

DIN Rail Terminal Blocks > Spring Clamp Connection

Date:2026-06-18Version:1.1

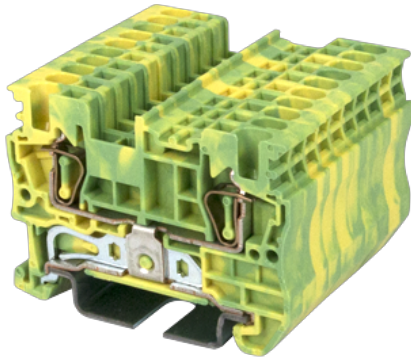

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.
The final product is made according to engineering drawing.

Product Description

Green-Yellow (default)

General information

Short description	DIN Rail terminal blocks, Grounding terminal blocks
Category	Grounding terminal blocks
Color	Green-Yellow (default)
Connection method	Spring Clamp Connection
Type of locking	Rail Mounting
Length (mm)	49
Width (mm)	4.2
Height (mm)	35.5
Level	Single level
Connection points	2

Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0

Insulation resistance	$\geq 500\text{M}\Omega$ at DC 500V
-----------------------	-------------------------------------

Connection data-IEC

Rated impulse voltage (III/3)(KV)	8
Conductor cross section solid. min (mm ²)	0.14
Conductor cross section solid.max (mm ²)	1.5
Conductor cross section stranded. min (mm ²)	0.14
Conductor cross section stranded. max (mm ²)	1.5
Conductor cross section flexible, with min ferrule without plastic sleeve (mm ²)	0.25
Conductor cross section flexible, with max ferrule without plastic sleeve (mm ²)	0.75
Conductor cross section flexible, with min ferrule with plastic sleeve (mm ²)	0.25
Conductor cross section flexible, with max ferrule with plastic sleeve (mm ²)	0.75
Slotted screwdriver size (Blade thickness x Width)(mm)	0.4x2.5
Stripping Length (mm)	10
Mounting rail	TS-35
End cover plate required	YES
Grounding connections	YES

Connection data-UL

Min. solid wire connection (AWG) acc. to UL/CUL	30
Max. solid wire connection AWG acc. to UL/CUL	14
Min. stranded wire connection AWG acc. to UL/CUL	30
Max. stranded wire connection AWG acc. to UL/CUL	14

Environment & Safety

Back of the hand protection (YES or NO)	YES
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40

UL Recognized

Wire Range (Group B)(AWG)	30~14
Rated voltage (Group B)(V)	600

Wire Range (Group C)(AWG)	30~14
Rated voltage (Group C)(V)	600



CUL Recognized

Wire Range (Group B)(AWG)	30~14
Rated voltage (Group B)(V)	600
Wire Range (Group C)(AWG)	30~14
Rated voltage (Group C)(V)	600

VDE Approval

Wire Range (mm ²)	0.14~1.5
Rated voltage (V)	630

Drawings

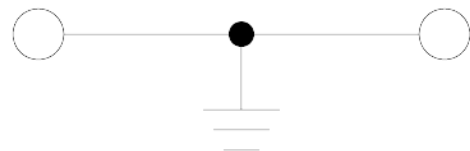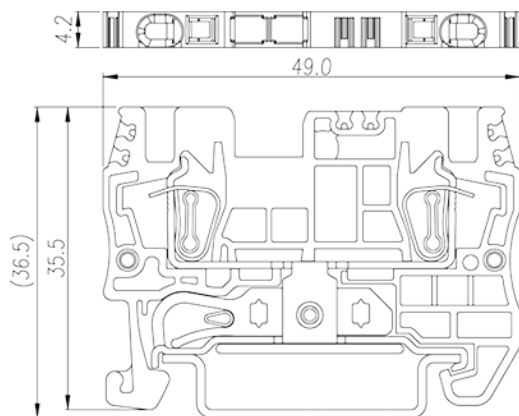

Approvals



Accessories



MKG-001

Label


For SS2N, SS6N, SS7N, DP Series, AK Series. Using UL94-V0 class of insulation material.



MKG-002

Label

For SS2N, SS6N, SS7N, DP Series, AK Series. Using UL94-V0 class of insulation material.



SS6N

End Bracket

For TS-35, TS-35/15 rails. Beige color. Using UL94-V0 class of insulation material.



TM41LW

Marking Label

For BEST APPLICATION : DP1.5N, DP1.5N-PE, DP1.5N-TN, DP1.5N-TN-PE, DP1.5N-TR, DP1.5N-TR-PE, DPH1.5, DPH1.5-PE, DPP1.5N, DPP1.5N-PV, DPP1.5N-L2PE, DPP1.5N-PE, DPH1.5SG AVAILABLE APPLICATION : AK1.5, AK1.5-PE, AK1.5-TN, AK1.5-TN-PE, AK1.5-TR, AK1.5-TR-PE, AKK1.5 White color. Using UL94-V0 class of insulation material.



SS11

End Bracket

For TS-35, TS-35/15 rails. Beige color. Using UL94-V0 class of insulation material.



TM46LW

Marking Label

For BEST APPLICATION : DP1.5N, DP1.5N-PE, DP1.5N-TN, DP1.5N-TN-PE, DP1.5N-TR, DP1.5N-TR-PE, DPH1.5, DPH1.5-PE AVAILABLE APPLICATION : AK1.5, AK1.5-PE, AK1.5-TN, AK1.5-TN-PE, AK1.5-TR, AK1.5-TR-PE White color. Using UL94-V0 class of insulation material.



TS-35

DIN-Rail






For DP / DK..N / DK.. / AK / DKB / DKU.. /DKM.. series. Material is iron. Length of 1000mm / 2000mm.



TS-35/15

DIN-Rail

For DK / DK-PE series. Material is iron. Length of 1000mm / 2000mm.

	TS-35C DIN rail end cap For TS-35 rail. Black color. Using UL94-V2 class of insulation material.
	TM-R100 Continuous Flat Marking Labels
	TM-R200 Continuous Flat Marking Labels
	SS7N End Bracket For TS-35, TS-35/15 rails. Beige color. Using UL94-V0 class of insulation material.
	SS4N End Bracket For TS-35, TS-35/15 rails. Beige color. Using UL94-V0 class of insulation material.
	SS13 End Bracket For TS-35, TS-35/15 rails. Beige color. Using UL94-V0 class of insulation material.
	SS5N End Bracket For TS-35, TS-35/15 rails. Beige color. Using UL94-V0 class of insulation material.
	SS2N End Bracket For TS-35, TS-35/15 rails. Beige color. Using UL94-V0 class of insulation material.

