
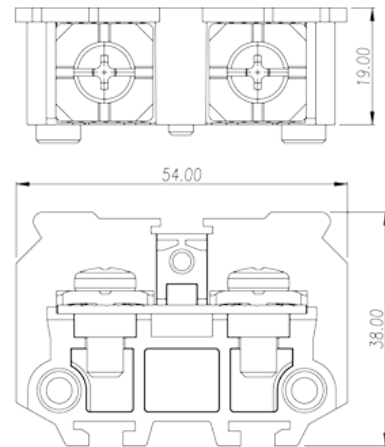


DKB80

NEMA Terminal Blocks > Rail Mounting

Date:2026-06-20

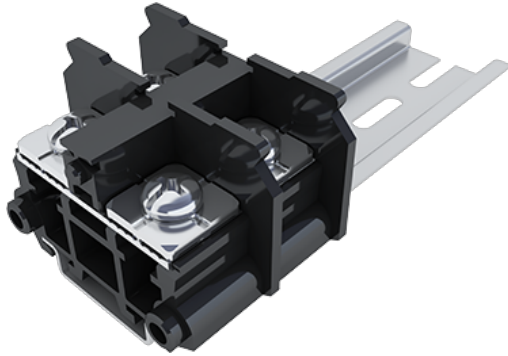

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.
The final product is made according to engineering drawing.

Product Description

M6, 600V, 85A

General information

Short description	Feed-Through single level,Screw Connection
Category	Feed-Through single level
Color	Refer to drawing
Connection method	Screw connection
Type of locking	Rail mounting
Length (mm)	54
Width (mm)	19
Height (mm)	41.5(TS-35N) / 49(TS-35/15N)
Level	Single level
Connection points	2

Material information

Insulation material	PC
Insulation material group	IIIa
Flame retardant rating , compliant with UL94	V2
Insulation resistance	□1000MΩ at DC 500V

Conductor material	COPPER ALLOY
Plating of conductor surface	Ni PLATED

Connection data-IEC

Rated voltage (V)	800
Rated current (A)	76(0.75~16mm ²) / 101(25mm ² With Ring terminal)
Rated voltage (III/3)(V)	800
Rated impulse voltage (III/3)(KV)	8
Conductor cross section solid. min (mm ²)	0.75
Conductor cross section solid.max (mm ²)	16
Conductor cross section stranded. min (mm ²)	16
Conductor cross section stranded. max (mm ²)	16 (Bare wire) or 25
Screw thread	M6
Slotted screwdriver size (Blade thickness x Width)(mm)	1.0x5.5
Philips screwdriver size	PH2
Rated torque (N.m)	3
Recommend tightening torque. min (N.m)	2.5
Recommend tightening torque. max (N.m)	3
Stripping Length (mm)	16~17 The stripping length depends on the specification provided by the cable lug manufacturer
Mounting rail	TS-35N 、TS-35/15N
End cover plate required	YES
Grounding connections	NO

Connection data-UL

Rated voltage (UL/CUL Group B)(V)	600
Rated current (UL/CUL Group B)(A)	85
Rated voltage (UL/CUL Group C)(V)	600
Rated current (UL/CUL Group C)(A)	85
Min. solid wire connection (AWG) acc. to UL/CUL	18
Max. solid wire connection AWG acc. to UL/CUL	4
Min. stranded wire connection AWG acc. to UL/CUL	18
Max. stranded wire connection AWG acc. to UL/CUL	4

Environment & Safety

Back of the hand protection (YES or NO)	YES
Finger protection (YES or NO)	NO
Operating temperature. max (°C)	125
Operating temperature. min (°C)	-40

UL Recognized

Wire Range (Group B)(AWG)	18~4
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	85
Wire Range (Group C)(AWG)	18~4
Rated voltage (Group C)(V)	600
Rated current (Group C)(A)	85

CUL Recognized


Wire Range (Group B)(AWG)	18~4
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	85
Wire Range (Group C)(AWG)	18~4
Rated voltage (Group C)(V)	600
Rated current (Group C)(A)	85

VDE Approval

Wire Range (mm ²)	0.75~25
Rated voltage (V)	800
Rated current (A)	76(0.75~16mm ²) / 101(25mm ² With Ring terminal)

Drawings

--	--

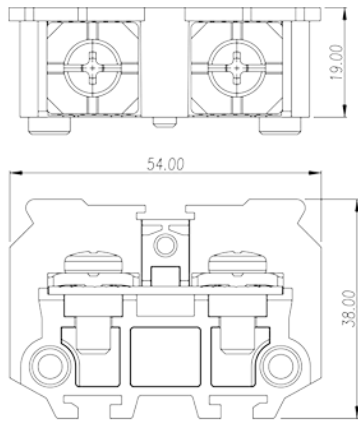

Approvals



Accessories



CSK01-60XX-A

Insertion bridge

For DKB80, DKB80-XXPCK. Material is copper alloy then tin-plated on surface.



CSK01-60XX-B

Insertion bridge

For DKB80, DKB80-XXPCK. Material is copper alloy then tin-plated on surface.



CSK02-60XX-A

Insertion bridge

For DKB80, DKB80-XXPCK. Material is copper alloy then tin-plated on surface.



CSK02-60XX-B

Insertion bridge

For DKB80, DKB80-XXPCK. Material is copper alloy then tin-plated on surface.

DKBC60-1000

Cover

	For DKB80, DKB80-XXPCK. Using UL94-V2 class of insulation material.
	TS-35 DIN-Rail For DP / DK..N / DK.. / AK / DKB / DKU.. /DKM.. series. Material is iron. Length of 1000mm / 2000mm.
	TS-35/15 DIN-Rail For DK / DK-PE series. Material is iron. Length of 1000mm / 2000mm.
	TM-R200 Continuous Flat Marking Labels
	SS10 End Bracket For TS-35 / TS-35A rails Black color Using UL94-V0 class of insulation material
	DKB80E-A End Cover For DKB80. Black color. Using UL94-V2 class of insulation material.